



Digital Signage Product Line Specification




Ceres-084

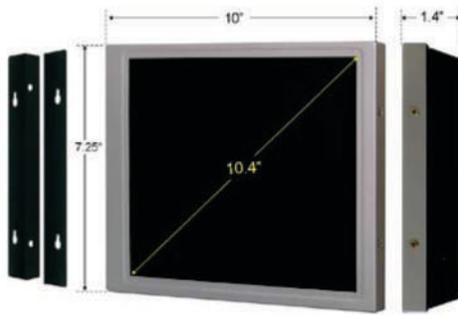


Ceres-100



Ceres-170

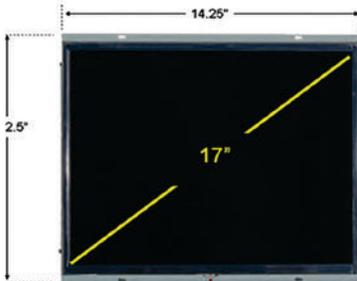

Ceres-171

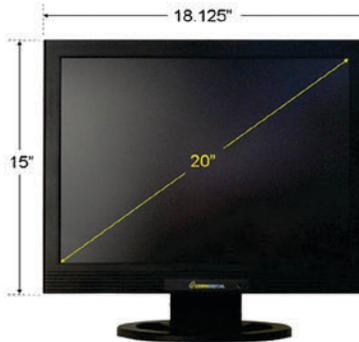

Ceres-200 & 200N



Ceres-86
& 86TV

	Ceres-084	Ceres-100	Ceres-170	Ceres-171	Ceres-200	Ceres-200N	Ceres-86	Ceres-86TV
--	-----------	-----------	-----------	-----------	-----------	------------	----------	------------

LCD Size	8"	10.4"	17"	17"	20.1"	20.1"		TV Tuner
LCD Resolution	640x480	640x480	1280x1024	1280x1024	1280x1024	1280x1024		
Brightness	350nit	400nit	400nit	400nit	300nit	300nit		
Display Resolution	640 x 480					1280x1024	1080i	
Support Media	CF/SD					CF/HDD	CF/HDD	
Support Playback	JPEG.Motion JPEG.MP3.MPEG1/2/4					WMV*		
Playback Mode	Continuous loop mode. IMD mode					SignageNow**		
Speakers	2Wx2. ext. jack							
Timer Schedule	Daily schedule on/off control. 4 shifts segment					Server control		
Network Interface	None					10/100 ethernet		
Frame	Front Cover Detachable	Plastic	Open Frame	Plastic		Metal		

***Ceres-86, 86TV, 200N Support**

- Video Decoding: MPEG-1, MPEG-2 MP @ (720p/1080i)
- MPEG-4 ASP@L5(720p)
- Windows Media Video(WMV9) Main Profile / Medium Level (720p)
- Image: JPEG
- BMP (4bpp, 7bpp or 24bpp)
- Audio Decoding: Dolby Digital
- MPEG-1 and MPEG-2 Layers I, II and III(MP3)
- Windows Media Audio 9(WMA9)
- Video Output: Stereo (L/R) audio output (Earphone)

****SignageNow**

- Broadcast media control (over 300 locations)
- Content schedule control
- Playlist logs available
- Multi-zone display (7 max.)
- User defined template available
- Web interface no software installation needed

SignageNow

Specifications are subjected to changes without prior notification.