

Ceres-88V Video-in Networked Digital Signage Player

Networked Digital Signage Player Broadcasting Live TV + Your Ads

Live TV Feeds



Your Ads
 Promotions
 Weather
 RSS Feeds
 and more

Boost Your TV Investment Returns!

Specification

Software

OS Embedded Linux

Support Media

HD, DVD-Video, WMV9, JPEG

Video Specification

- MPEG-1 [.mpg], MPEG-2 MP@(720p/1080i)[.mpg, .vob]
 - MPEG-4 ASP @ L5 (720p)[.mp4, .avi]
 - Windows Media Video 9 MP/ML (720p)(.wmv)

Photo Specification

- JPEG

Playback Mode

Local stored media & playlist playback

Connecting Server

CM (Content Management) Server

Web application no software installation needed
 Upload content, Design template, Setup playlist & schedule
 HTTP protocol ; where PC can surf the website

Internet Protocol

IP Address

DHCP client or fixed IP

Hardware

CPU RISC 200MHz

Memory DDR400 128MB

Flash 16MB

Mixer 1366 x 768

Storage 4GB SSD (Solid State Disk)

Wireless (optional) 802.11 b/g , 64/128-bit WEP Encryption, Detachable antenna


Network 10/100Mb Ethernet (RJ45)

Display Output VGA 1920 x 1200, 1920 x 1080, 1280 x 1024, 1024 x 768
 YPbPr 1080P, 1080i, 720P

Connector VGA, YPbPr, Ethernet (RJ45), RS-232 x 2, USB x 2, Audio R/L, Video-in

Power input +12VDC 0.5A

Dimension 14.6" x 6.1" x 1.3"

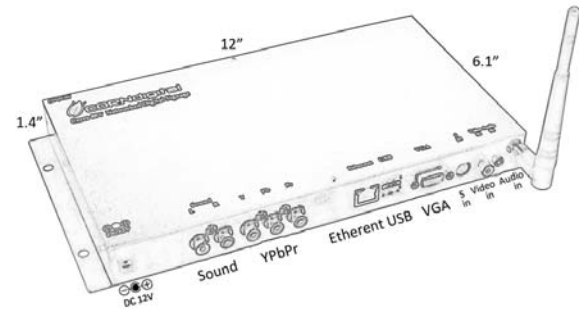

Ceres-88V

Component YpbPr

Composite Video



Camera



Dish Network
 Direct TV



Settop box
 Cable box

Ordering Information

Ceres-88V Video-in Networked Digital Signage Player

Ceres-88HV YPbPr-in Networked Digital Signage Player

Please contact us for a free consultation!

13945 Central Ave., Chino, CA 91710
 TEL: (909) 680-3671 FAX: (909) 680-3675
 www.corndigital.com
 sales@corndigital.com